


Product

929R Series


*Schlage Full-Size IC Core
Ratchet Lock*

Data Sheet

Accepts Schlage full-size
interchangeable core (core
not included)

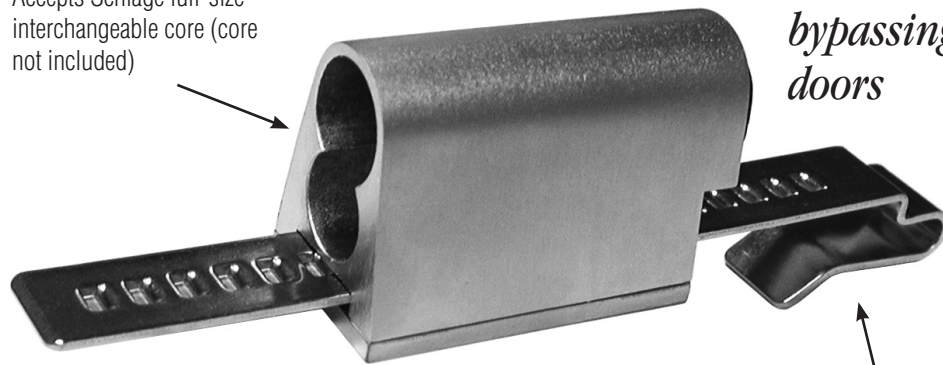

*Ratchet lock for
bypassing sliding
doors*



Includes plastic actuator
to functionally test lock
without core

*Ships standard with strap for
1/4" material thickness. Optional
straps for 3/8" or 5/8" material
thicknesses available.*

OLYMPUS
LOCK, INC.
The cabinet lock innovators.

18424 Highway 99 • Lynnwood, WA 98037
Phone 206-362-3290 • Toll-free 800-525-0954 • Fax 206-362-3569
www.olympus-lock.com • info@olympus-lock.com

929R SERIES

Schlage Full-Size IC Core Ratchet Lock



General Specifications

929R Series Ratchet Lock

Body: Zinc die cast

Body diameter: 1-1/8"

Max. door material thickness: 1/4"

Finish: US26D (satin chrome)

Cylinder: Not included.

Accepts the following full-size cylinders:

- Schlage Quad, Numbered Section, and Schlage Classic IC cores
- Schlage Primus® and Everest large format IC cores
- Keymark large format IC Cores
- Mul-T-Lock large format IC cores

Function: Key removable in locked and unlocked position.

Accessories


Includes:

- 7788-PA plastic actuator
- 729RS-1 strap for 1/4" door material thickness


Available separately:

- 729RS-2 strap for 3/8" door material thickness
- 729RS-3 adjustable strap for maximum 5/8", minimum 3/8" panel thickness

929R Series Dimensions

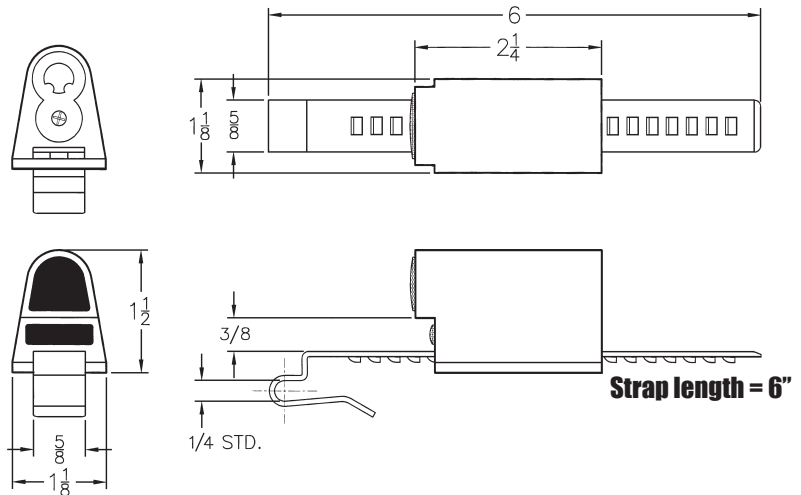


929R typical installation:

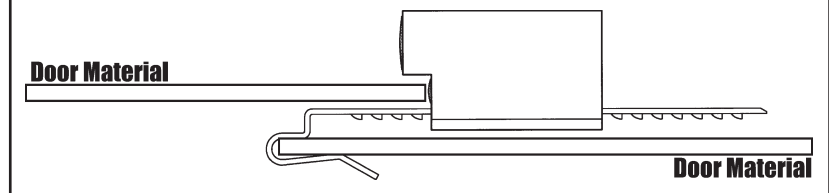

Alternate Strap Dimensions

729RS-2 strap for 3/8" material. Available separately.

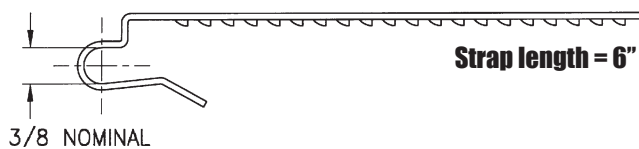

729RS-3 adjustable strap for 3/8" to 5/8" material. Available separately.

